

ENCODER

Analog Multiturn Encoder



Serie 8.M3661/M3681

Key-Features:

- Shaft with max. 10 mm diameter
- 0...5/10V, 4...20 mA analog output
- Sturdy bearing construction
- Housing diameter 36 mm
- Protection class IP67
- Singelturn accuracy $\pm 1^\circ$
- Maximum revolution speed 6000 turns/min
- Temperature range -40...+85°C

Content:

Order Code2
Technical Data3
Outputs & Connections5
Dimensions6

Absolute encoders – multiturn


Compact electronic multiturn, magnetic

Sendix M3661 / M3681 (shaft / hollow shaft)

Analog



The Sendix M36 with Energy Harvesting Technology is an electronic multiturn encoder in miniature format, without gear and without battery. With a size of just 36 x 53 mm it offers a blind hollow shaft of up to 10 mm.

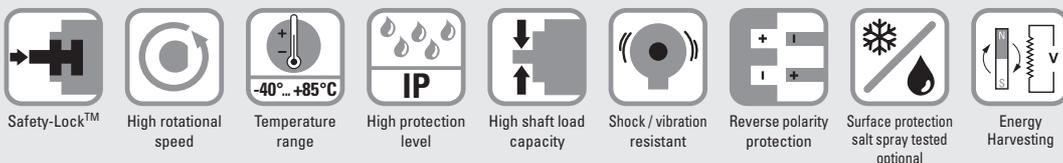

Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Reduced number of components ensures magnetic insensitivity.
- IP67 protection and wide temperature range -40°C ... +85°C.
- Without gear and without battery, thanks to the Energy Harvesting technology.

Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Measuring range scalable.
- Limit switch function.

Order code
Shaft version

8.M3661 . XXXX . XX 1 2
Type



a Flange

- 1 = clamping flange, IP67, ø 36 mm [1.42"]
- 3 = clamping flange, IP65, ø 36 mm [1.42"]
- 2 = synchro flange, IP67, ø 36 mm [1.42"]
- 4 = synchro flange, IP65, ø 36 mm [1.42"]**

b Shaft (ø x L), with flat

- 1 = ø 6 x 12.5 mm [0.24 x 0.49"]
- 3 = ø 8 x 15 mm [0.32 x 0.59"]**
- 5 = ø 10 x 20 mm [0.39 x 0.79"]
- 2 = ø 1/4" x 12.5 mm [0.49"]

c Output circuit ¹⁾

- 3 = current output**
- 4 = voltage output**

d Type of connection

- 1 = axial cable, 1 m [3.28'] PVC
 - A = axial cable, special length PVC *)
 - 2 = radial cable, 1 m [3.28'] PVC
 - B = radial cable, special length PVC *)
 - 3 = axial M12 connector, 5-pin
 - 4 = radial M12 connector, 5-pin**
- *) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M3661.433A.3112.0030 (for cable length 3 m)

e Interface / resolution / power supply

- 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC**
- 4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC**
- 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

f Measuring range

- 1 = 16 revolutions / cw**
- 2 = 16 revolutions / ccw
- 3 = scalable up to 65,536 revolutions, with limit switch function / cw
- 4 = scalable up to 65,536 revolutions, without limit switch function / cw
- 5 = scalable up to 65,536 revolutions, with limit switch function / ccw
- 6 = scalable up to 65,536 revolutions, without limit switch function / ccw

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

1) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – multiturn

**Compact
electronic multiturn, magnetic**

Sendix M3661 / M3681 (shaft / hollow shaft)

Analog

**Order code
Hollow shaft**

8.M3681.XXXX.XX12
Type

10 by 10

a Flange

2 = with stator coupling, IP65, ø 46 mm [1.81"]
3 = with spring element, long, IP65
5 = with stator coupling, IP67, ø 46 mm [1.81"]
6 = with spring element, long, IP67

b Blind hollow shaft

(insertion depth max. 18.5 mm [0.73"])
1 = ø 6 mm [0.24"]
3 = ø 8 mm [0.32"]
4 = ø 10 mm [0.39"]
2 = ø 1/4"

c Output circuit ¹⁾

3 = current output
4 = voltage output

d Type of connection

1 = axial cable, 1 m [3.28'] PVC
A = axial cable, special length PVC *)
2 = radial cable, 1 m [3.28'] PVC
B = radial cable, special length PVC *)
3 = axial M12 connector, 5-pin
4 = radial M12 connector, 5-pin
*) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
Ex.: 8.M3681.243A.3112.0030 (for cable length 3 m)

e Interface / resolution / power supply

3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC
4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC
5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

f Measuring range

1 = 16 revolutions / cw
2 = 16 revolutions / ccw
3 = scalable up to 65,536 revolutions,
with limit switch function / cw
4 = scalable up to 65,536 revolutions,
without limit switch function / cw
5 = scalable up to 65,536 revolutions,
with limit switch function / ccw
6 = scalable up to 65,536 revolutions,
without limit switch function / ccw

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

Mounting accessory for shaft encoders

Order no.

Coupling

Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]

8.0000.1102.0808

Mounting accessory for hollow shaft encoders

Dimensions in mm [inch]


Order no.

Cylindrical pin, long

for flange with spring element
(flange type 3 + 6)

with fixing thread

8.0010.4700.0000

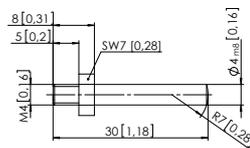

Connection technology

Order no.

Cordset, pre-assembled

M12 female connector with coupling nut, 5-pin,
2 m [6.56'] PVC cable

05.00.6081.2211.002M

Connector, self-assembly (straight)

M12 female connector with coupling nut, 5-pin

8.0000.5116.0000

Technical data

Mechanical characteristics

Maximum speed

shaft or blind hollow shaft version 6000 min⁻¹
without shaft seal (IP65) 3000 min⁻¹ (continuous)

shaft or blind hollow shaft version 4000 min⁻¹
with shaft seal (IP67) 2000 min⁻¹ (continuous)

Starting torque at 20°C [68°F]

without shaft seal < 0.007 Nm
with shaft seal (IP67) < 0.01 Nm

Shaft load capacity

radial 40 N
axial 20 N

Weight

approx. 0.2 kg [7.06 oz]

Protection acc. to EN 60529

IP65 or IP67

Working temperature range

-40°C ... +85°C [-40°F ... +185°F]

Materials

shaft / hollow shaft stainless steel
flange aluminum
housing zinc die-cast
cable PVC

Shock resistance acc. to EN 60068-2-27

2500 m/s², 6 ms

Vibration resistance acc. to EN 60068-2-6

300 m/s², 10 ... 2000 Hz

1) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – multiturn

Compact electronic multiturn, magnetic

Sendix M3661 / M3681 (shaft / hollow shaft)

Analog

Electrical characteristics current interface 4 ... 20 mA	
Power supply	10 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the power supply	yes
Short-circuit proof outputs	yes ¹⁾
Measuring range	factory setting 2 ⁴ revolutions optionally scalable up to 2 ¹⁶ revolutions
DA converter resolution	12 bit
Singleturn accuracy , at 25°C [77°F]	±1°
Temperature coefficient	< 100 ppm/K
Repeat accuracy , at 25°C [77°F]	±0.2°
Output load	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm
Setting time	< 1 ms, R _{Burden} = 900 Ohm, 25°C [77°F]
LEDs (green/red)	<ul style="list-style-type: none"> - system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode
Options	<ul style="list-style-type: none"> - output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function
Teach inputs	level = +V for 1 s min.
PowerON Time	< 1 s
Update rate	1 ms
e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)
UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V	
Power supply	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the power supply	yes
Short-circuit proof outputs	yes ¹⁾
Measuring range	factory setting 2 ⁴ revolutions optionally scalable up to 2 ¹⁶ revolutions
DA converter resolution	0 ... 10 V 12 bit 0 ... 5 V 11 bit
Singleturn accuracy , at 25°C [77°F]	±1°
Temperature coefficient	< 100 ppm/K
Repeat accuracy , at 25°C [77°F]	±0.2°
Current output	max. 10 mA
Setting time	< 1 ms, R _{Load} = 1000 Ohm, 25°C [77°F]
LEDs (green/red)	<ul style="list-style-type: none"> - system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode
Options	<ul style="list-style-type: none"> - output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function
Teach inputs	level = +V for 1 s min.
PowerON Time	< 1 s
Update rate	1 ms
e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)
UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

1) When the power supply is correctly applied.
But not output to +V. Power supply and sensor output signal are not galvanically isolated.

Absolute encoders – multiturn

Compact electronic multiturn, magnetic		Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
Electrical characteristics current interface 4 ... 20 mA		Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V	
Power supply	10 ... 30 V DC	Power supply	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
Current consumption (no load)	max. 30 mA	Current consumption (no load)	max. 30 mA
Reverse polarity protection of the power supply	yes	Reverse polarity protection of the power supply	yes
Short-circuit proof outputs	yes ¹⁾	Short-circuit proof outputs	yes ¹⁾
Measuring range	factory setting 2 ⁴ revolutions optionally scalable up to 2 ¹⁶ revolutions	Measuring range	factory setting 2 ⁴ revolutions optionally scalable up to 2 ¹⁶ revolutions
DA converter resolution	12 bit	DA converter resolution	0 ... 10 V 12 bit 0 ... 5 V 11 bit
Singleturn accuracy, at 25°C [77°F]	±1°	Singleturn accuracy, at 25°C [77°F]	±1°
Temperature coefficient	< 100 ppm/K	Temperature coefficient	< 100 ppm/K
Repeat accuracy, at 25°C [77°F]	±0.2°	Repeat accuracy, at 25°C [77°F]	±0.2°
Output load	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm	Current output	max. 10 mA
Setting time	< 1 ms, R _{Burden} = 900 Ohm, 25°C [77°F]	Setting time	< 1 ms, R _{Load} = 1000 Ohm, 25°C [77°F]
LEDs (green/red)	- system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode	LEDs (green/red)	- system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode
Options	- output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function	Options	- output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function
Teach inputs	level = +V for 1 s min.	Teach inputs	level = +V for 1 s min.
PowerON Time	< 1 s	PowerON Time	< 1 s
Update rate	1 ms	Update rate	1 ms
e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)	e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)
UL approval	file 224618	UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU	CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

1) When the power supply is correctly applied.
But not output to +V. Power supply and sensor output signal are not galvanically isolated.

Absolute encoders – multiturn

Compact electronic multiturn, magnetic	Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
---	--	---------------


Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, $\varnothing 36$ [1.42]

Flange type 1 and 3

- 1 3 x M3, 6 [0.24] deep

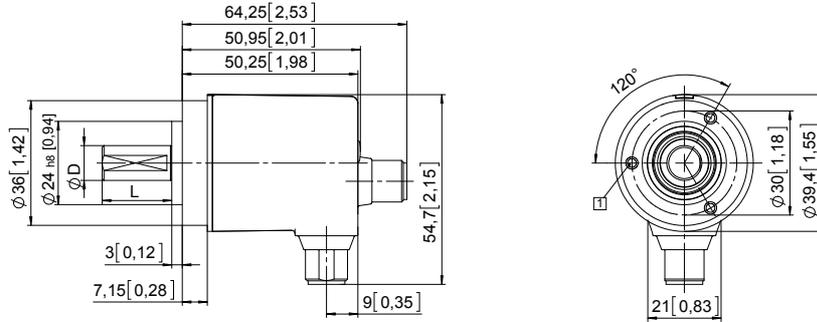


D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Synchro flange, $\varnothing 36$ [1.42]

Flange type 2 and 4

- 1 4 x M3, 6 [0.24] deep

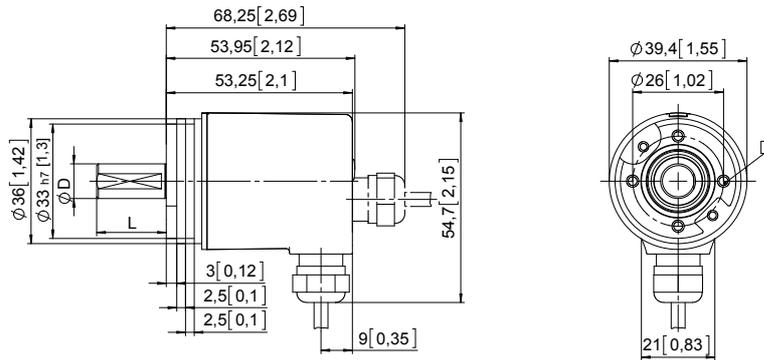

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Absolute encoders – multiturn

**Compact
electronic multiturn, magnetic**

Sendix M3661 / M3681 (shaft / hollow shaft)


Analog

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, long Flange type 3 and 6

- 1 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

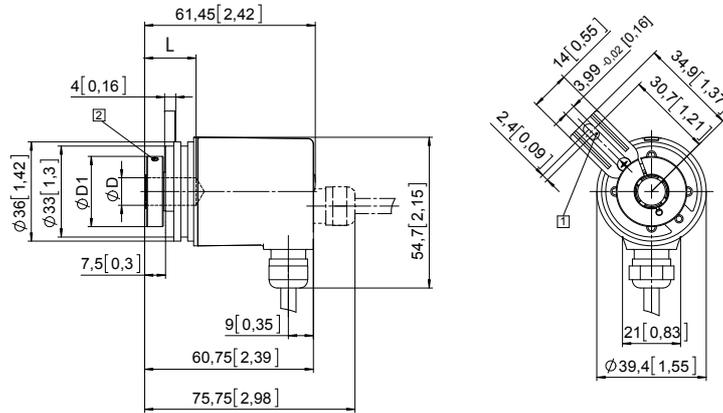


D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing 46$ [1.81] Flange type 2 and 5

- 1 Recommended torque for the clamping ring 0.7 Nm

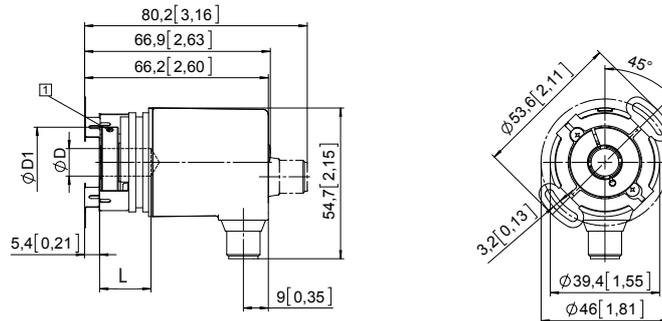

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

Subject to change without prior notice

WayCon Positionsmesstechnik GmbH
email: info@waycon.de
internet: www.waycon.biz

Head Office
Mehlbeerenstr. 4
82024 Taufkirchen
Tel. +49 (0)89 67 97 13-0
Fax +49 (0)89 67 97 13-250

Office Köln
Auf der Pehle 1
50321 Brühl
Tel. +49 (0)2232 56 79 44
Fax +49 (0)2232 56 79 45